

(19) World Intellectual Property Organization
International Bureau



12 OCT 2004

(43) International Publication Date
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number
WO 03/090337 A1

(51) International Patent Classification⁷: **H02M 5/293**

(21) International Application Number: **PCT/GB03/01633**

(22) International Filing Date: **15 April 2003 (15.04.2003)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
0208600.7 **15 April 2002 (15.04.2002)** **GB**

(71) Applicant (for all designated States except US): **THE UNIVERSITY OF NOTTINGHAM** [GB/GB]; University Park, Nottingham NG7 2RD (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WHEELER, Patrick** [GB/GB]; The University of Nottingham, University Park, Nottingham NG7 2RD (GB). **CLAIRE, John** [GB/GB]; The University of Nottingham, University

Park, Nottingham NG7 2RD (GB). **EMPRINGHAM, Lee** [GB/GB]; The University of Nottingham, University Park, Nottingham NG7 2RD (GB).


(74) Agents: **FOX-MALE, Nicholas, H.** et al.; Eric Potter Clarkson, Park View House, 58 The Ropewalk, Nottingham NG1 5DD (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **POWER CONVERTER**

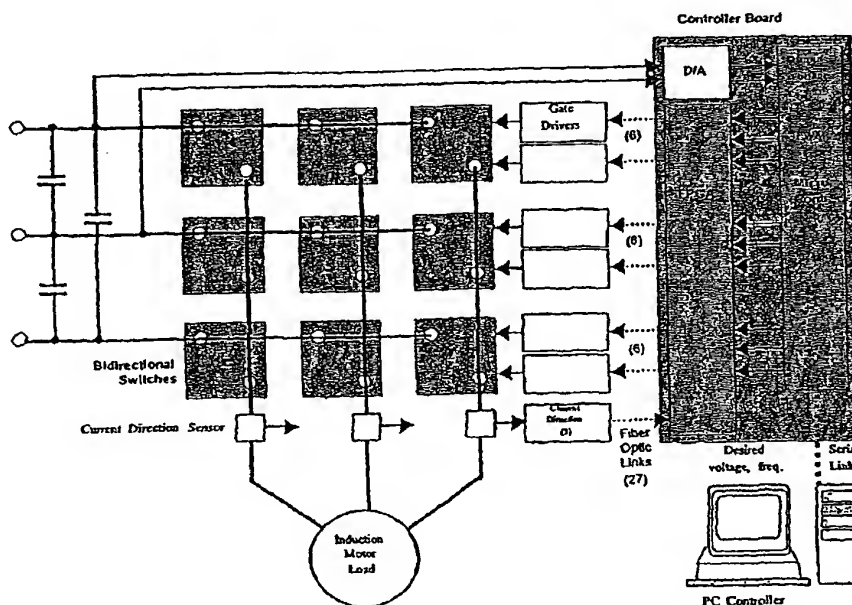

(57) Abstract: In motor control of electric vehicles, a snubberless 10KVA Matrix Converter uses discrete 65 Amp, 1200 Volt MOS Controlled Thyristors (MCTs) to minimise commutation time and so achieve the optimum waveform quality, particularly useful when controlling induction motors in applications where the controller may demand very low output voltages. The matrix converter has significant advantages over the conventional dc link converter by eliminating the dc link capacitor.

BEST AVAILABLE COPY